

TOYOTA

TOYOTA MATERIAL HANDLING INTERNATIONAL





BT tyro

Powered pallet truck

The LHE150 is the perfect entry model for light electric pallet truck applications. Capacity of the truck is 1500 kg and it is equipped with li-ion technology for energy efficiency.

It combines the features of a powered pallet truck with the flexibility of a hand pallet truck.

Dimensional drawings

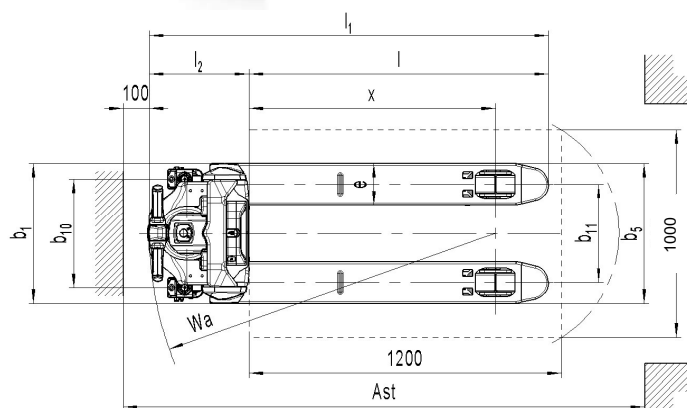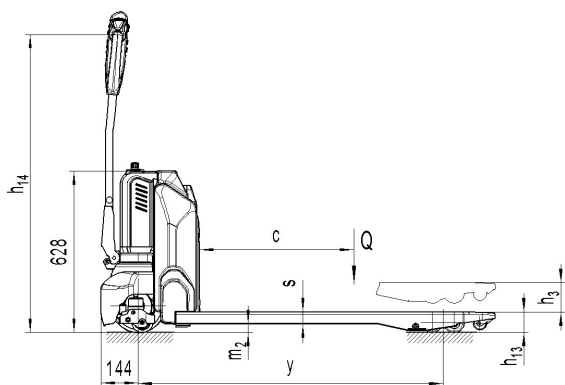

Features



Data sheet

Type sheet for industrial truck acc. to (EN 16796-2)				
Distinguishing mark	1.2	Manufacturer`s type designation	LHE150	
	1.3	Power	Battery	
	1.4	Operator type	Pedestrian / Stand	
	1.5	Load Capacity / rated load	Q (t)	1.5
	1.6	Load centre distance	c (mm)	600
	1.8	Load distance, centre of drive axle to fork	x(mm)	1017
	1.9	Wheelbase	y (mm)	1255
Weight	2.1	Service weight	kg	123
	2.2	Axle loading, laden front/rear	kg	623 / 1000
	2.3	Axle loading, unladen front/ rear	kg	96 / 27
Tires, chassis	3.1	Tires		Polyurethane (PU)
	3.2	Drive wheel	Ø x w (mm)	Ø 210x70
	3.3	Fork wheels	Ø x w (mm)	Bogie Ø 62x70
	3.4	Castor wheels	Ø x w (mm)	Ø 80x30
	3.5	Wheels, number front/ rear (x=driven wheels)		1x +2 / 4
	3.6	Tread, front	b10 (mm)	420
	3.7	Tread, rear	b11 (mm)	380
Dimensions	4.4	Lift height	h3 (mm)	115
	4.9	Height of tiller in drive position min. / max.	h14 (mm)	700 / 1160
	4.15	Height lowered	h13 (mm)	62
	4.19	Overall length	l1 (mm)	1600
	4.20	Length to face of forks	l2 (mm)	380
	4.21	Overall width	b1 (mm)	540
	4.22	Fork dimensions	s/e/l (mm)	47 / 160 / 1220
	4.25	Width across forks	b5 (mm)	540
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	15
	4.34	Aisle width for pallets 800X1200 lengthways	Ast(mm)	2000
	4.35	Turning radius	Wa (mm)	1400
Performance	5.1	Travel speed, laden/ unladen	km/h	4.6 / 4.8
	5.2	Lift speed, laden/ unladen	m/s	0.020 / 0.025
	5.3	Lowering speed, laden /unladen	m/s	0.05 / 0.04
	5.8	Gradeability, laden/ unladen	%	4 / 16
	5.10	Service brake		Electromagnetic
Motors	6.1	Drive motor rating S2 60min	kW	0.65
	6.2	Lift motor rating at S3 10%	kW	0.50
	6.3	Battery acc. to DIN 43531 /35 / 36 A, B, C, no		No
	6.4	Battery voltage, nominal capacity K5	V/Ah	24 / 36
	6.5	Battery weight (minimum)	kg	7
	6.6	Energy consumption acc. to VDI cycle	KWh/h	0.22
	8.1	Type of drive control		DC - Speed Control
	8.4	Sound level at driver`s ear acc. to EN 12053	dB(A)	69

Product specification

The LHE150 compact design is perfect for light applications in confined areas such as retail, shops, warehouses and factories.

The LHE150 is ergonomic and can be manoeuvred effortlessly thanks to its tiller arm allowing it to work perfectly while on a vertical position.

This truck comes with a long life maintenance free Lithium-ion battery with quick and easy charging ensuring high availability and flexibility.



Specification	BT Tyro
Service weight including battery	123 kg
Load Capacity	1500 kg
Height, fork lowered	62 mm
Overall length	1600 mm
Overall width	540 mm
Turning radius	1400 mm
Travel speed, with/without load	4.6/4.8 km/h
Drive motor rating S2 60min	0.65 kW
Battery weight	7 kg
Sound level at driver's ear acc. to EN 12053	<70 dB(A)



Lithium-ion battery for increased productivity



Pin code for access control



Effortless manoeuvrability, light and compact



Ergonomic design perfect for confined areas

Distributor

