

FGZN/FDZN SERIES



Features and equipment may vary depending on market.

SIMPLE AND TOUGH

THE SAME HIGH QUALITY AS ALWAYS

The FGZN/FDZN Series continues the tradition of high quality with reliable components.

TOYOTA-BUILT ENGINE




The 1DZ-II is shown.

CONTINUATION OF SAFETY

Stable Design for the Vehicle Body

The use of a rear axle damper helps ensure lateral stability and supports safe operation.



Key-lift Interlock

When the key is switched off the forks do not descend even if the load-handling levers are operated. This can help prevent accidents caused by unintended operation by someone other than the operator.



Lattice-design Headguard

The headguard uses a lattice design that combines outstanding upward visibility and strength.



NEW Orange Seatbelt OPT

The color of the seatbelt to be orange, making it easier to confirm if the seat belt is securely fastened.

NEW Seatbelt Interlock System OPT


The forklift does not move unless the seatbelt is properly fastened.

OPERATOR-FRIENDLY DESIGN



Small-diameter Steering Wheel

The small-diameter steering wheel teams up with the full hydraulic power steering system to provide excellent maneuverability. The steering column offers stepless adjustment to accommodate a wide range of operator preferences.

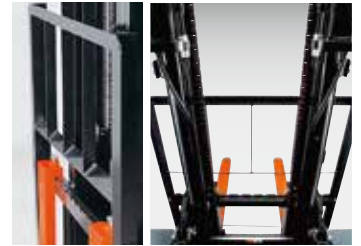

Excellent Forward Visibility

The angled lower stay ensures a good view of the fork tips, which makes it easier to insert forks into the pallet on the ground.

EASY MAINTENANCE



Engine Hood

The wide-opening engine hood supports easy access to the engine compartment for inspection or servicing.



NEW LED Front / Rear Combination Lights OPT

These economical LED lights offer long life and low energy consumption.




MAIN SPECIFICATIONS

Model		FGZN20	FDZN20	FGZN25	FDZN25	FGZN30	FDZN30
Engine Model		4Y Gasoline	1DZ-II Diesel	4Y Gasoline	1DZ-II Diesel	4Y Gasoline	1DZ-II Diesel
Load Capacity	kg	2000		2500		3000	
Load Center	mm	500		500		500	
Overall Width	A mm	1150		1150		1255	
Turning Radius (outside)	B mm	2200		2260		2400	
Overhead Guard Height	C mm	2130		2130		2195	
Length to Fork Face	D mm	2570		2650		2770	

ENGINE SPECIFICATIONS

Model		TOYOTA 4Y Gasoline	TOYOTA 1DZ-II Diesel
Piston Displacement	cc	2237	2486
Rated Power/r.p.m.	kW	30/2000	35/2200
Rated Torque/r.p.m.	N-m	153/1600	156/2100

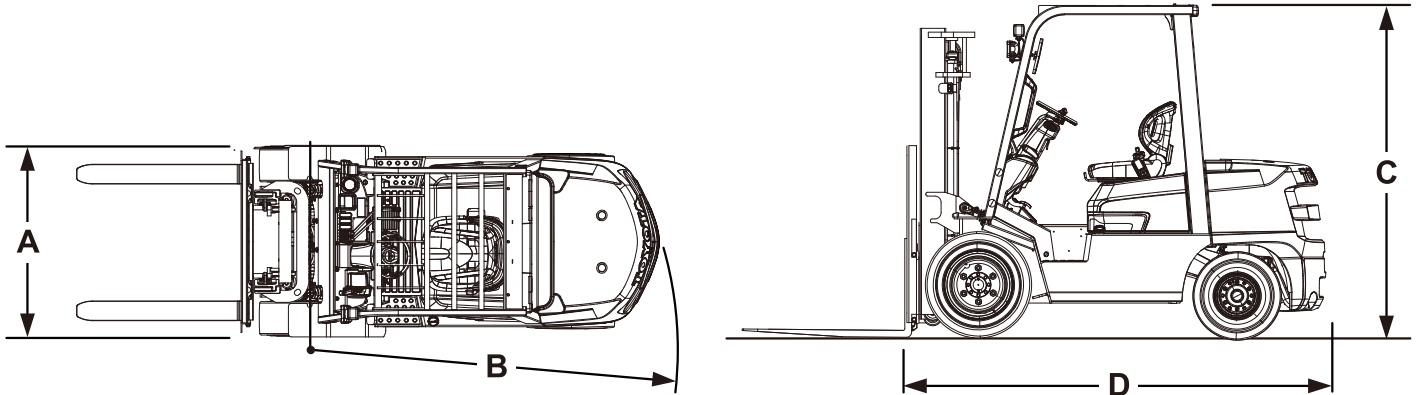

The data in this brochure was determined based on our standard testing conditions. Operating performance may vary depending on the actual specifications and condition of the vehicle, as well as the conditions of the operating area.

Due to photography and printing, the color of actual vehicle may vary from this brochure. Some photos have been computer-enhanced.

Availability and specifications are determined by market and are subject to change without notice.

Safe forklift operation is achieved by proper operator training and proper worksite rules. Please consult your Toyota representative regarding forklift selection and operator training.

Please consult your Toyota representative for details.

All rights reserved by Toyota Industries Corporation.